


WWW.RESTARSOLAR.COM

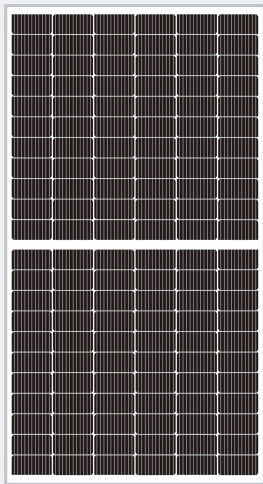

144 Cells

Mono N-Type/Topcon 9-11 BB

480-515W

Power output


21.69%

The Highest Efficiency

0~+5W

Tolerance

0.5% Annual Degradation over 30 years

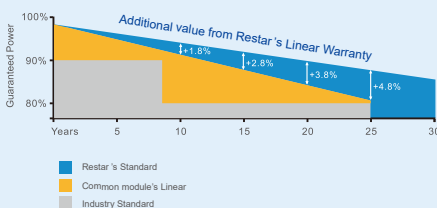

LINEAR PERFORMANCE WARRANTY

15 Year Product Warranty

30 Year Linear Power Warranty

RT8H-M(N-type Topcon)

RT8H-M(N-type TOPCon) series is produced with high efficiency multi-busbar cells, which can reduce the module internal power loss to improve its conversion efficiency, as well as lower the failure risk caused by cracks and broken busbar to enhance the module reliability. Combined with half-cell technology, the module is highly resistant to hot-spot crisis caused by shadow effect.



High Reliability

Multi-busbar technology can effectively reduce the reliability risk caused by cells cracks and broken busbar.



Anti-PID Resistance

Prominent anti PID performance reduces the power degradation, leading to higher energy yield and lower LCOE.



Durability Against Extreme Conditions

Certified to resist high salt mist and ammonia conditions.



High Efficiency

Multi-busbar technology can reduce the module internal power loss to improve the module conversion efficiency significantly.



Low-Light Performance

With high transmittance and anti-reflective 3.2mm tempered glass, the module has stronger performance under low light circumstances.



High Mechanical Strength

Certified to withstand: high wind load(2400Pa) and snow load(5400Pa).

Full range of products and certification systems

ISO 9001 TUV PID-FREE CE IEC61215/61730/61701/62716




RS8H-M

N-type Topcon




GLOBAL PROFESSIONAL PV PRODUCTS INTERGRATED SOLUTIONS SUPPLIER


Dimension of PV Modules Unit: mm

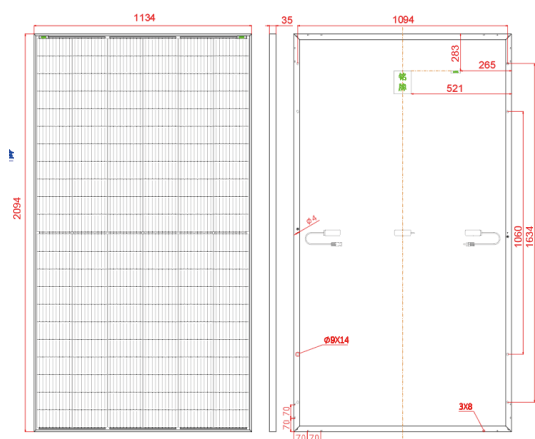

I-V CURVES OF PV MODULE

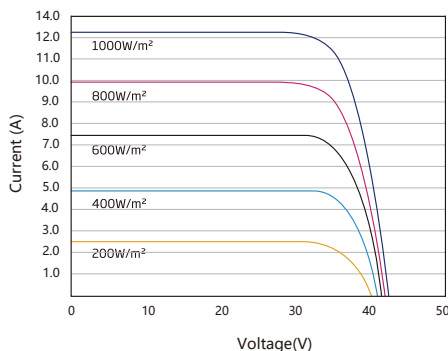

P-V CURVES OF PV MODULE

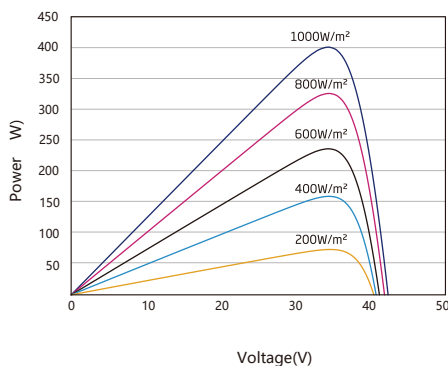

Address: No.30 Yongshun Road, Zhulin Town, Jintan District, Changzhou, Jiangsu Province, China
Web: www.resunsolar.com
E-mail: info@resunsolar.com
Tel: +86 512-66292101 / +86 512-66293858

ELECTRICAL DATA(STC)

Rated Power in Watts-Pmax(Wp)	480	485	490	495	500	505	510	515
Open Circuit Voltage-Voc(V)	45.07	45.20	45.33	45.46	45.59	45.72	45.85	45.98
Short Circuit Current-Isc(A)	13.65	13.72	13.79	13.86	13.93	14.00	14.07	14.14
Maximum Power Voltage-Vmp(V)	37.62	37.81	37.99	38.17	38.35	38.53	38.71	38.89
Maximum Power Current-Imp(A)	12.76	12.83	12.90	12.97	13.04	13.11	13.17	13.24
Module Efficiency (%)	20.21%	20.42%	20.64%	20.85%	21.06%	21.27%	21.48%	21.69%

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA(NOCT)

Maximum Power-Pmax(Wp)	363	367	370	374	378	382	386	390
Open Circuit Voltage-Voc(V)	42.15	42.30	42.43	42.58	42.72	42.86	42.99	43.13
Short Circuit Current-Isc(A)	10.99	11.06	11.13	11.20	11.27	11.34	11.41	11.48
Maximum Power Voltage-Vmp(V)	35.54	35.67	35.76	35.84	35.93	36.02	36.11	36.20
Maximum Power Current-Imp(A)	10.21	10.28	10.36	10.44	10.52	10.60	10.68	10.77

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Mono-crystalline 182*91mm,9/10/11 Bus bars
Cell configuration	132cells(6*22)
Module dimensions	2094*1134*35/30mm
Weight	26.3/25kg
Front Cover	3.2mm Tempered Glass
J-BOX	IP68
Cable	4mm ² (IEC)/12AWG(UL),350mm+450mm
Connectors	MC4 or MC4 Comparable
Standard Packaging	36/31 pcs/pallet

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature(NOCT)	45°C+2°C
Temperature Coefficient of Voc	- 0.32%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	- 0.35%/°C
Operational Temperature	- 40~+85°C
Maximum System Voltage	1500V(EC)/1500V
Max Series Fuse Rating	25A
Limiting Reverse Current	25A

40HQ	
Modules per container	936pcs/806pcs
Package	36/31 pcs/pallet
Package Number	26pallets/26pallets
Package Weight	846kg/pallet
Package Dimension	2125*1130*1270mm/pallet